(30) Priority Data:

TO93A000967

# WORLD INTELLECTUAL PROPERTY ORGANIZATION International Bureau



### INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup>:
H04N 7/16, 7/173
A1
(11) International Publication Number: WO 95/17796
(43) International Publication Date: 29 June 1995 (29.06.95)

IT

(21) International Application Number: PCT/EP94/04195

(22) International Filing Date: 16 December 1994 (16.12.94)

(71) Applicant (for all designated States except US): URMET

20 December 1993 (20.12.93)

(71) Applicant (for all designated States except US): URMET SUD S.P.A. COSTRUZIONI ELETTRO-TELEFONICHE [IT/IT]; Via di Castel Romano, 167, I-00129 Roma (IT).

(72) Inventor; and
(75) Inventor/Applicant (for US only): MONDARDINI, Massimo
[IT/IT]; Via Mazzini, 40, I-10123 Torino (IT).


(74) Agent: MODIANO, Guido; Modiano & Associati, Via Meravigli, 16, I-20123 Milano (IT).

(81) Designated States: BR, PL, US, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).

Published

With international search report.

(54) Title: SYSTEM FOR ENABLING THE DECODING OF TELEVISION PROGRAMS

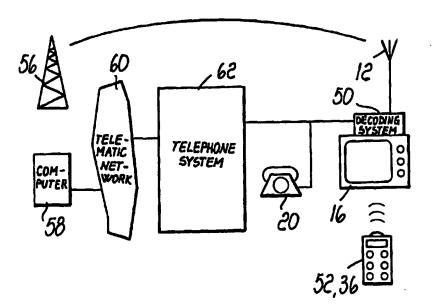

(57) Abstract

System for enabling the decoding of television programs comprising a transmitter (36, 52) for wireless signals such as infrared or radio signals, which can be operated by the user with a keyboard; and an overvoice modulator (50) that can be directly connected to a user telephone (20) wire pair which is connected to an overvoice network (62) for connection to a telematic network (60) to which a television station (56, 58) can be connected; said modulator (50) is driven by a transducer that is suitable to receive and convert the signals emitted by the wireless transmitter (36, 52) in order to send, over the telephone wire pair, messages directed to the television station (58). The transmitter (52, 36) is preferably provided in handheld size, is preferably provided with functions for controlling the television set (16), and can be provided with a magnetic card reader.

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
ΑU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE '	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JР	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgystan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic	SD	Sudan
CG	Congo		of Korea	SE	Sweden
CH	Switzerland	KR	Republic of Korea	SI	Slovenia
CI	Côte d'Ivoire	KZ	Kazakhstan	SK	Slovakia
CM	Cameroon	LI	Liechtenstein	SN	Senegal
CN	China	LK	Sri Lanka	TD	Chad
CS	Czechoslovakia	LU	Luxembourg	TG	Togo
CZ	Czech Republic	LV	Latvia	TJ	Tajikistan
DE	Germany	MC	Monaco	TT	Trinidad and Tobago
DK	Denmark	MD	Republic of Moldova	UA	Ukraine
ES	Spain	MG	Madagascar	US	United States of America
FI	Finland	ML	Mali	UZ	Uzbekistan
FR	France	MN	Mongolia	VN	Viet Nam
GA	Gahon		5	•••	

WO 95/17796 1

## SYSTEM FOR ENABLING THE DECODING OF TELEVISION PROGRAMS Technical Field

The present invention relates to a system for enabling the decoding of television programs broadcast in encrypted or coded form.

#### Background Art

Broadcast pay-TV is currently provided mainly by 5 transmitting coded programs and by providing users of the service with a corresponding decoder. The user pays an initial price for the purchase of the decoder and then pays a periodic license or subscription for flat-fee access to all the broadcast programs.

It is known that the coding system is essentially 10 encryption in which one or more of the parameters of the transmitted signal is processed before being broadcast; decoder performs the reverse process. Coding and decoding are therefore linked to a numeric key which is similar to 15 the encryption keys used in cryptography.

A first drawback of the above described system is that in practice the subscriber pays for the availability the service, not for its actual use: the intensive user pays a low price for each program, whereas the occasional user pays 20 an excessive price that can lead him to renounce the entire service.

Another severe drawback is that the operator of the service must have full control over the sale of decoders, as each sale must be matched by the activation of a 25 subscription contract. This entails maintaining a complex and extensive network for controlling the points of sale.

However, the most severe drawback from the point of

PCT/EP94/04195 WO 95/17796 2

view of the service operator is that the decoders might be duplicated illicitly by external organizations and marketed illegally. The owners of such "pirate" decoders can in fact access the encrypted programs for free and indefinitely 5 without having to pay the corresponding license and without ever being identifiable.

Accordingly, it would be desirable to provide decoded programs to users individually and selectively, that is to say, obtaining from the individual user his approval for 10 viewing the individual program each time, selectively enabling his decoder and charging him the corresponding price.

#### Disclosure of the Invention

The aim of the invention is therefore to provide a system that allows this selective and individual decoding 15 enabling.

This aim and other objects and advantages which will become apparent from the continuation of the description are achieved by the invention with a system for enabling the decoding of television programs as defined in the appended 20 claims.

#### Brief description of the drawings

The invention is now described in greater detail with reference to a preferred embodiment, given by way of nonlimitative example and shown in the accompanying drawings, wherein:

25 figure 1 is a block diagram of a preferred embodiment of a decoding enabling system according to the invention; and

figure 2 is a block diagram that shows how a system

according to the invention is included operationally in a network for communication with a television station.

### Ways of carrying out the invention

It is known that networks for interconnecting user outlets, or wire pairs, connected to the exchanges, and an telematic network are among the services 5 independent currently offered by public telephone systems in some countries. The signals that originate from telephone users and are meant for the telematic network are supplied to the wire pair after being modulated over a carrier frequency 10 outside the voice range, with a method known as "overvoice transmission", so as not to interfere with the normal use of the telephone. This interconnecting network includes exchange equipment located in the exchanges of the public telephone system to receive and demodulate the overvoice 15 messages, decode at least the part of the message that identifies its destination, and then send the message on the external telematic network, where the message is routed to the receiving party. Likewise, the signals transmitted in the opposite direction travel in the same way.

20 An interconnecting network such as the one described above has been installed for example in Italy by Telecom and is known as "Argotel".

According to the present invention, the decoder associated with the television set of the user to decode the encrypted television signal is provided with an overvoice modem which is connected to the "Argotel" telematic network by means of the home telephone wire pair of the user, so as to receive an enabling signal from a television station which is connected to said telematic network. The user,

4

again by means of the overvoice modem, can send to the television station a signal that approves the enabling of the decoder and thus the charging of the service to his account. Enabling furthermore occurs preferably by sending 5 an approval key which is specific for the individual user and is linked to a code that is hardwired into his decoder, as explained hereinafter. This obviously makes it impossible to use illegal decoders, since the enabling signal sent by the exchange is a function of the code that is hardwired or stored in the decoder and varies with each individual user.

In figure 1, a decoder 10 is connected to an antenna 12 so that it can receive an encrypted television signal, decode it by using a decoding key CHD received at an input 14, and apply the decoded television signal to a television 15 set 16.

A user telephone wire pair 18 is furthermore connected to a telephone exchange, not shown, and through said exchange also to an "Argotel" telematic network, which is also not shown. The telephone wire pair 18 is connected not 20 only to the conventional telephone set 20 but also to an overvoice modem 22 which is also known as overvoice terminal (TOV) and is per se known. The TOV has an output 24 on which it can output a signal that arrives from the telematic network and consists of a decoding enabling code AD; the TOV 25 22 also has an input 26 on which it can receive a signal that consists of a user identification code IU to transmit it to the telematic network as part of a message to be sent to a television station according to a preset protocol which not part of the present invention. 30 identification code IU is contained in a ROM 30 and can be

WO 95/17796 PCT/EP94/04195

transferred to the input 26 of the TOV 22 by means of a port 32 that can be enabled by an infrared-ray sensor 34 when it receives an approval signal from an infrared-ray remote control 36 which can in turn be operated by the user by 5 means of a keyboard. The remote control 36 is preferably produced in portable form, so that it can be easily be held in the hand by the viewer during use (so-called handheld format) and can be integrated with the conventional remote control of the television set 16.

The output 24 of the TOV 22 on which the enabling code

AD is output is connected to a first input of a combiner

circuit 38 which has a second input that receives a personal

user code PU from a ROM 40. The combiner circuit 38 is

configured so as to combine the enabling code AD received

15 from the TOV with the personal user code PU according to a

preset arbitrary algorithm, so as to provide, on an output

41, a decoding key CHD which is applied to the decoder 10.

The operation of the decoding system shown in figure 1 is now described with reference to figure 2.

In figure 2, the decoding system which is surrounded by a dashed line in figure 1 is generally designated by the reference numeral 50 and is connected to the television set 16, with which a remote control 52 is associated; said remote control also includes the functions of the remote control 36 of figure 1. The system receives, by means of the receiving antenna 12, a television program transmitted by a television camera, not shown, by means of a broadcasting antenna 56. The television station furthermore has a computer 58 which is connected to a telematic network, for example the "Argotel" packet-switching network,

6

schematically designated by the reference numeral 60. The "Argotel" network is linked to the telephone system 62 in a per se known manner.

Before the encrypted program begins, the television broadcasts on television an uncoded 5 station regarding the program about to be broadcast, inviting viewers to accept it, that it so say, signal their approval for purchase. If the user accepts, he operates the remote control 36 to energize the sensor 34 and enable the transfer 10 of his identification code IU from the ROM 30 to the TOV 22 and thus to the telephone wire pair, as part of an overall message, based on a known protocol, that finally reaches, over the telematic network 60, the computer 58 of the television station. The computer records the message, checks 15 the user's credit by charging the service to his account, and finally sends over the telematic network 60 a reply message which is addressed to the user and contains an enabling code AD that is specific for that user. The TOV 22 receives the message and outputs the enabling code AD on its 20 output 24, and therefore on the first input of the combiner circuit 38, which combines said code with the personal user code PU supplied by the ROM 40, according to a preset algorithm. The enabling code AD is chosen by the station so that the decoding key CHD used by the decoder 10 to decode is generated when the enabling code AD is combined with the personal user code PU according to the selected algorithm.

The ROMs 30 and 40, which are shown separately in figure 1, are in practice a single data memory, for example in the form of an integrated circuit which is enclosed in a cartridge or card that can be inserted in a connector of the

. 30

PCT/EP94/04195 WO 95/17796 7

apparatus, and is delivered to the user when he approves the subscription contract. As an alternative, the apparatus may be provided with a reader for cards with magnetic bands and the codes can be recorded on a corresponding card. Or, also, 5 the codes can be written in the integrated circuit of a chip-card. In the case of the magnetic-band card or of the chip-card, said cards can also act as credit cards and also include data related to the user's credit.

It is evident to the expert in the field that the 10 structure and operating method of packet-based telematic networks, and particularly of the "Argotel" network, allow deal with considerable peaks of demand without overloading. In other words, these networks are well-suited meeting requests for the purchase of television which are necessarily concentrated in short 15 programs, periods shortly before the individual programs, especially those most appreciated by viewers.

The invention offers several advantages with respect to known forms of encrypted pay-TV, including:

- a) the viewer only pays the charge for the desired 20 programs, and the annual cost of the service for that viewer is proportional to actual use;
- it is no longer necessary to keep control over decoder sales, which can indeed be fully liberalized; when 25 he registers as a subscriber at the television station, the user receives a card or cartridge which contains his personal codes as described above and must be inserted in the decoder:
- substantially the possibilities of fraud are C) 30 eliminated: even if a fraudulent user managed, by chance or

WO 95/17796 PCT/EP94/04195

by spying, to learn the decoding key in a given case, with the system according to the invention the key can be changed at any time, from one program to the next, or even during the same program.

A preferred embodiment in a simplified form has been described and can be modified and changed in many ways by using means that are known to the expert. For example, the television station might send a single enabling message that includes a validity period or send two messages in sequence, 10 one for enabling decoded viewing on the part of the user and one for disabling it. Purchase approval might furthermore be given not by a remote control, but with a button on the decoder cabinet, optionally protected by a key or controlled with a credit card. The encoding or encryption methods may 15 also be any of the several known ones in which the algorithm includes a decoding key. It is also evident that the teachings of the invention can also be applied by transmitting the user approval messages and the decoding enabling messages from the television station over the dial-up telephone network instead of 20 conventional overvoice frequencies: this solution might be preferable in particular cases. In general, the operating methods may be developed or improved on the basis of the described principle.

#### CLAIMS

- System for enabling the decoding, at a user's
- 2 location, of television programs broadcast by a station,
- 3 characterized in that it comprises:
- a decoder (10) which is adapted to receive a coded
- 5 television signal and to decode it by processing based on a
- 6 digital decoding key (CHD) which can be applied to one of
- 7 its inputs;
- 8 an overvoice modem (22) which can be directly
- 9 connected to a user telephone wire pair which is connected
- 10 to an overvoice network (62) for connection to a telematic
- 11 network (60) to which a computer (58) of the television
- 12 station can be connected;
- permanent memory means (30, 40) for storing at least
- 14 one user identification code (IU) and a personal user code
- <sup>15</sup> (PU);
- control means (32) for activating said modem so that
- 17 it sends a message in overvoice, said message being directed
- 18 to said computer (58) of the television station and
- 19 containing said user identification code, in order to cause
- 20 said computer (58) to send an overvoice message which is
- 21 directed to said overvoice terminal (22) and contains a
- 22 decoding enabling code (AD); and
- 23 a combiner circuit (38) for combining, according to a
- 24 preset algorithm, the personal user code (PU) with said
- 25 decoding enabling code (AD) obtained from said user
- 26 terminal.
  - Decoding enabling system according to claim 1,
- <sup>2</sup> characterized in that said control means are constituted by

5 enabling input.


WO 95/17796 PCT/EP94/04195


10

3 a port (32) between said permanent memory means (30) and an 4 activation input (26) of said modem (22) and in that said 5 port (32) can be activated by the user.

- 3. Decoding enabling system according to claim 2, characterized in that said port (32) can be activated by an infrared-ray remote control (36) which is suitable to activate an infrared-ray sensor (34) connected to a port
- 4. Decoding enabling system according to claim 3, 2 characterized in that said remote control (36) is provided 3 in handheld size.
- 5. Decoding enabling system according to claim 3 or 4, characterized in that said remote control (36) is integrated in a remote control (52) for activating the functions of a television set.
- 1 6. Decoding enabling system according to one of claims <sup>2</sup> 1 to 5, characterized in that said permanent memory means <sup>3</sup> (30,40) are constituted by a ROM.
- 7. Decoding enabling system according to one of claims 2 1 to 5, characterized in that said permanent memory means 3 (30,40) are constituted by a magnetic card or by a chip-4 card.
- 8. Decoding enabling system according to one of claims 2 1 to 7, characterized in that said control means (32) 3 comprise a magnetic card or chip-card reader.

WO 95/17796 PCT/EP94/04195

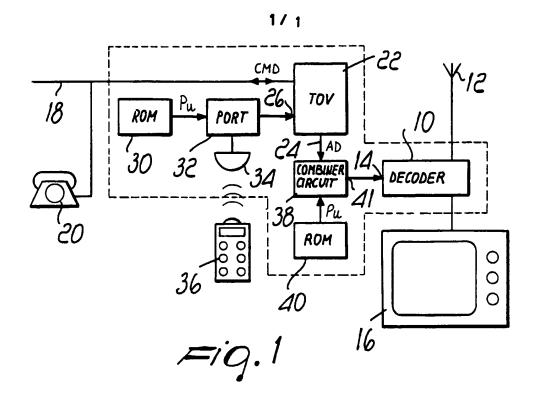

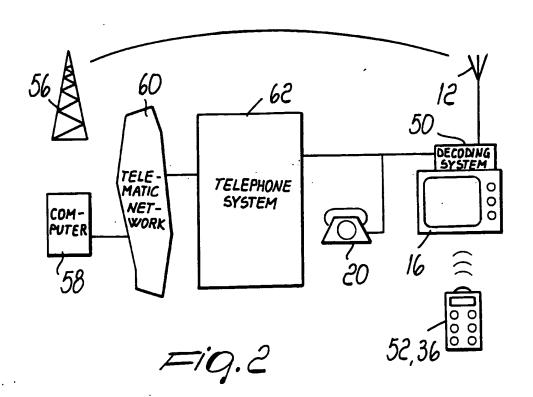

### INTERNATIONAL SEARCH REPORT

Inte mal Application No
PCT/EP 94/04195

	·	<u>'</u>	017 21 017 01230		
A. CLASS IPC 6	HO4N7/16 HO4N7/173				
According	to International Patent Classification (IPC) or to both national classi	fication and IPC			
	S SEARCHED				
Minimum of IPC 6	documentation searched (classification system followed by classificat HO4N HO4M	ion symbols)			
Documenta	stion searched other than minimum documentation to the extent that	such documents are include	d in the fields searched		
Electronic	data base consulted during the international search (name of data bas	e and, where practical, sear	ch terms used)		
C. DOCUN	MENTS CONSIDERED TO BE RELEVANT				
Category *	Citation of document, with indication, where appropriate, of the re-	elevant passages	Relevant to claim No.		
Υ	US,A,5 270 809 (GAMMIE ET AL.) 14	December	1		
A	see column 1, line 37 - column 2, see column 5, line 63 - column 6		2-8		
Y	SYMPOSIUM RECORD - CATV SESSIONS 1991, MONTREUX, SWITZERLAND pages 229 - 238 REMME 'DATA OVER TELEPHONY/TV-EXC see the whole document	1			
A	EP,A,O 489 385 (TECNOENERGIA BY June 1992 see the whole document	TEL) 10	1-8		
A	EP,A,O 506 435 (SCIENTIFIC-ATLAN September 1992 see page 10, line 45 - page 11,		1-8		
V Fu	rther documents are listed in the continuation of box C.		mbers are listed in annex.		
	categories of cited documents:		<u> </u>		
consi 'E' earlie	"A" document defining the general state of the art which is not considered to be of particular relevance		T' later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention  X' document of particular relevance; the claimed invention		
'L' docur which citati 'O' docur	g date ment which may throw doubts on priority claim(s) or th is cited to establish the publication date of another ion or other special reason (as specified) ment referring to an oral disclosure, use, exhibition or	involve an inventive "Y" document of particul cannot be considered document is combine	novel or cannot be considered to step when the document is taken alone ar relevance; the claimed invention to involve an inventive step when the id with one or more other such docution being obvious to a person skilled		
'P' docur	r means ment published prior to the international filing date but than the priority date claimed	in the art.  *& document member of			
	ne actual completion of the international search  3 March 1995	Date of mailing of th	e international search report 0 6, 04, 95		
	d mailing address of the ISA  European Patent Office, P.B. 5818 Patentiaan 2	Authorized officer			
	NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 epo nl, Fax: (+31-70) 340-3016	Greve, M			

Form PCT/ISA/210 (second sheet) (July 1992)

## INTERNATIONAL SEARCH REPORT

Inte mai Application No
PCT/EP 94/04195

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.	
Category *	Citation of document, with indication, where appropriate, of the relevant passages  EP,A,O 542 047 (TELENORMA) 19 May 1993 see abstract	Relevant to claim No.	
			DEST AVAILABLE COPY

1

Form PCT/ISA/210 (continuation of second sheet) (July 1992)

## INTERNATIONAL SEARCH REPORT

.aformation on patent family members

Inte	mal Application No /EP 94/04195	
PCT	/EP 94/04195	

Patent document cited in search report	Publication date	Patent family member(s)		Publication date	
US-A-5270809		AU-B- AU-A-	647255 1383892	17-03-94 08-10-92	
EP-A-0489385	10-06-92	NONE			
EP-A-0506435	30-09-92	US-A- AU-B- AU-A- CN-A- JP-A-	5237610 650958 1384092 1066950 5145923	17-08-93 07-07-94 01-10-92 09-12-92 11-06-93	
EP-A-0542047	19-05-93	DE-A- EP-A-	4217649 0542048	02-12-93 19-05-93	